
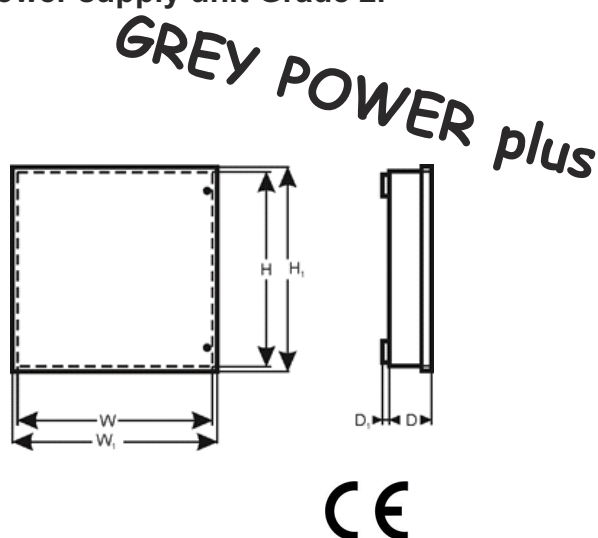


CODE: **AWZ 333** v.2.3/IX
TYPE: **AWZ 13,8V/3A/17Ah/LM Linear buffer power supply unit Grade 2.**

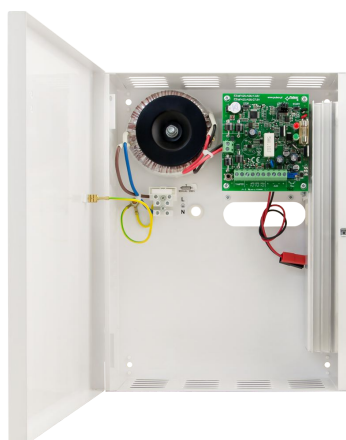

Features:

- EN50131-6 compliance, 1+2 grades and II environmental class
- mains supply 230VAC
- 13,8V DC uninterrupted supply
- fitting battery: 17Ah/12V
- PSU current efficiency:
 - 1,4A – for grades 1, 2 *
 - 3A – for general use **(see: chapter 1.1)
- linear voltage regulator
- microprocessor-based automation system
- output voltage control
- dynamic battery test
- battery electrical continuity control
- battery voltage control
- battery fuse status control
- battery charge and maintenance control
- deep discharge battery protection (UVP)
- battery output protection against short-circuit and reverse polarity connection
- battery charging current 0,4A/0,9A jumper selectable
- START function of manual switch to battery power
- STOP facility for manual disconnection during battery - assisted operation
- LED indication
- acoustic indication
- EPS technical output of 230V power failure - OC type
- PSU technical output indicating PSU and battery failure - OC type
- APS technical output indicating battery failure - OC type
- Optional installation of the MPSBS relay module changing technical outputs of the OC type to relay type
- adjustable times indicating AC power failure
- protections:
 - SCP short-circuit protection
 - OLP overload protection
 - over voltage protection
 - OHP overheat protection
 - surge protection
 - against sabotage
- warranty – 5 years from the production date

DESCRIPTION

The buffer power supply is designed in accordance with the requirements of the EN 50131-6 standard, grade 1+2 and II environmental class. It is intended for an uninterrupted supply of alarm system devices requiring stabilized voltage of **12V DC (+/-15%)**. A linear stabilizing system, which has been used in the unit, provides voltage with a lower level of noise and a quicker response to interference when compared to a switched-mode regulator.

Depending on a required protection level of the alarm system in the installation place, the PSU efficiency and the battery charging current should be set as follows:

* Grade 1, 2 - standby time 12h

Output current 1,4A + battery charging current 0,9A

** General use – if the PSU is not mounted in an installation compliant with the EN-50131 standard, the acceptable current efficiency amounts to:

1. Output current 3A (without a battery)

2. Output current 2,6A + 0,4A battery charging current

3. Output current 2,1A + 0,9A battery charging current

Total current of the receivers + battery charging current is max. 3A.

In case of power decay, a battery back-up is activated immediately. The PSU is housed in a metal enclosure with battery space for a 17Ah/12V battery. It is fitted with micro switches indicating unwanted door opening (front panel).

SPECIFICATIONS	
PSU type	A (EPS - External Power Source), protection class 1+2, II environmental class
Mains supply	230V/AC 50Hz (-15%/+10%)
Current consumption	0,42A @230V AC
PSU power	42W
Output voltage	11V± 13,8V DC – buffer operation 10V± 13,8V DC – battery-assisted operation
Output current	- for grades 1, 2: I _o = 1,4A + 0,9A battery charging current - for general use: I _o = 3A (without a battery) I _o = 2,6A + 0,4A battery charging current I _o = 2,1A + 0,9A battery charging current
Output voltage adjustment range	11±14,5V DC
Ripple voltage	20mVp-p
Battery charging current	0,4A/0,9A jumper selectable
Short-circuit protection SCP	200% ÷ 250% of PSU power - current limitation and/or fuse F _{BAT} damage in the battery circuit (fuse-element replacement required) Automatic return
Overload protection OLP	110% ÷ 150% (@25°C+65°C) of PSU power - limitation by the PTC resettable fuse, manual restart (disconnection of the DC output circuit)
Overvoltage protection OVP	U>16,5V disconnection of the output voltage (AUX+ disconnection), automatic return U> 14,5V fault indication
Battery circuit protection SCP and reverse polarity connection	F5A- current limitation, F _{BAT} fuse (in case of a failure, fuse-element replacement required)
Deep discharge battery protection UVP	U<10V (± 0,5V) – disconnection of battery terminal
Tamper protection: - TAMPER - indicates unwanted opening of the enclosure	- microswitch, NC contacts (enclosure closed), 0,5A@50V DC (max.)
Technical outputs: - EPS; output indicating AC power failure - PSU; output indicating no DC power/PSU failure - APS; output indicating battery failure	- OC type: 50mA max. Normal operation: L state (0V), failure: hi-Z state, - delay time 0s÷1h (+/-20%) – jumper selectable T _{AC} - OC type: 50mA max. Normal operation: L state (0V), failure: hi-Z state, - OC type, 50mA max. Normal operation: L state (0V), failure: hi-Z state
LED indication	LEDs: AC/DC power status, failure
Acoustic indication	piezoelectric indicator 75dB/0,3m, switchable via jumper
Operating conditions	II environmental class, -10 °C÷40 °C
Enclosure	Steel plate DC01, thickness: 0,7mm, colour: RAL 9003
Dimensions	W=230 H=300 D+D ₁ =92+8 mm [+/-2 mm] W ₁ =235, H ₁ =305 [+/-2 mm]
Net/gross weight	3,5 / 3,7kg
Fitting battery	17Ah/12V (SLA) max. 180x165x85mm (WxHxD) max
Closing:	Cheese head screw (at the front),
Declarations, warranty	CE, 5 year from the production date
Notes:	The enclosure does not adjoin the assembly surface so that cables can be led. Convictional cooling.

