


INSTALLATION INSTRUCTIONS



Wide Angle Outdoor Detector

QX Infinity series

WIRED MODEL

QXI-ST: Standard Wired Model

QXI-DT-X5: +Microwave detection (10.525 GHz)

QXI-DT-X8: +Microwave detection (10.587 GHz)

QXI-DT-X9: +Microwave detection (9.425 GHz)

1 Introduction



PDF download and additional information with multilanguage, available in;

<http://navi.optex.net/manual/50333>

- FR Le téléchargement PDF et des informations supplémentaires multilingues sont disponibles dans l'URL indiquée.
- DE PDF-Download und zusätzliche Informationen in mehreren Sprachen finden Sie unter der angezeigten URL.
- IT Download PDF e ulteriori informazioni con multilingua sono disponibili nell'URL mostrato.
- ES La descarga de PDF y la información adicional en varios idiomas están disponibles en la URL que se muestra.
- PT PDF download e informações adicionais com multilanguage estão disponíveis no URL mostrado.
- NL PDF-downloads en aanvullende informatie met meertalige zijn beschikbaar in de getoonde URL.

2 Manufacturer's statement

Warning

< QXI-DT only >

Prohibited

Recommended

Caution

Mounting height

Multi Level	2.2 m (7'3") to 2.7 m (8'11")
Pet Alley	0.8 m (2'7") to 1.2 m (4')

Pet Alley

The anti-blocking function can not be used with the pet alley setting.

3 Installation

How to open the cover

[1] Unlock the cover using a screwdriver (-).
[2] Lift the cover up.

Terminal

QXI-ST		QXI-DT	
Power	Spare	Power	Spare
+	-	+	-
SP	SP	SP	TR
COM	AL	COM	AL
TP	TP	TP	TP
TP	TP	TP	TP
		Trouble	

LED

Event	Icon	Seconds
[1] Warm-up	● ○ ● ○	60
[2] Alarm	●	2
[3] Walk test end	● ○ ● ○ ● ○ ● ○	5
[4] Blocking detection	● ○ x 3	∞

Do not touch the parts with this sign.

MW Sensitivity

L H default

Accessories

- Mounting screw (4 x 20 mm) x 2
- Fixing screw for the Main unit (3 x 12 mm) x 1
- Area masking strips

Options

- CA-1W(W) Bracket for wall mount
- CA-2C(W) Bracket for ceiling mount


Wiring

[1] Wiring knockout
[2] Wire through the knockout


4 Settings

4-1. Detection area


Multi Level **Top view**

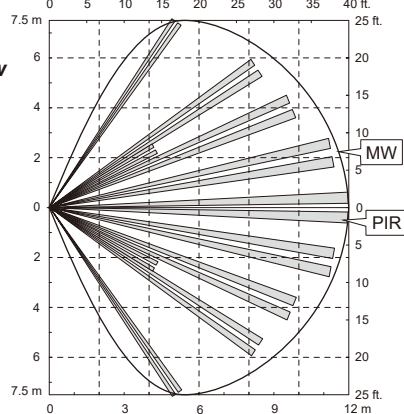

Side view




Pet Alley **Side view**




- [1] Loosen the lock screw.
- [2] Slide the Main unit down.
- [3] Rise the mirror up to the fixing position.
- [4] Tighten the lock screw as before.

Caution
The anti-blocking function can not be used with the pet alley setting.

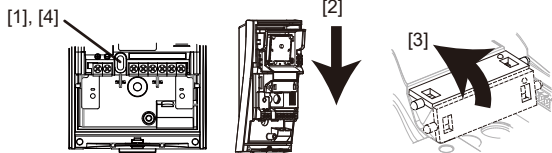


4-2. DIP switch settings

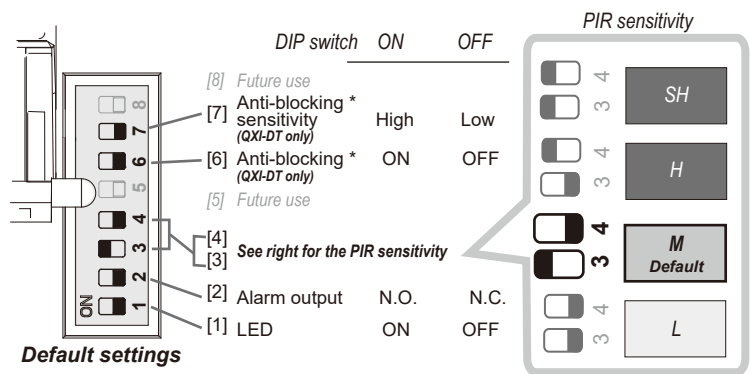

Default settings

* Objects moving nearby by the detector may affect the correct operation of the anti-blocking.

4-3. Walk test

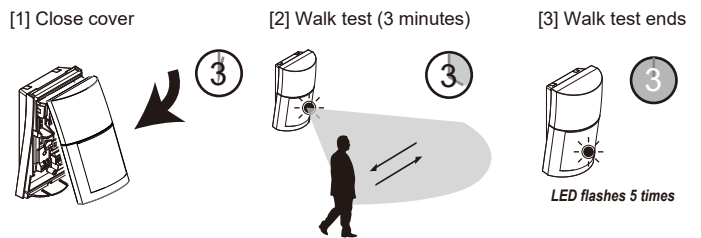

NOTE

- With the cover open, the tamper activates. This enables the LED function, regardless of DIP switch [1] setting.
- When the cover is closed, the Walk test timer starts and automatically returns to the normal mode after 3 minutes.
- If the unit is powered up with the cover closed, it will not enter walk test mode. Open and close the cover once to activate the walk test timer.


5 Specifications

5-1. Specifications

Model	QXI-ST	QXI-DT
Detection method	Passive infrared	Passive infrared & Microwave
PIR coverage	12.0 m (40') 120° wide	
PIR zones	Multi level: 40 zones Pet alley: 18 zones	
Detectable speed	0.3 to 2.0 m/s (1' to 6'7"/s)	
Sensitivity	2.0°C (3.6°F) at 0.6 m/s	
Pet alley	Remove lower area detection to avoid small animals.	
Power input	9.5 to 16 V DC	
Current draw	20 mA max. at 12 V DC	30 mA max. at 12 V DC
Alarm period	2.0 ± 0.5 s	
Warm-up period	Approx. 60 s (LED blinks)	
Alarm output	N.C/N.O. switchable, 28 V DC 0.1 A max.	
Trouble output	—	N.C. 28 V DC 0.1 A max.
Tamper output	N.C. 28 V DC 0.1 A max. Open when the cover is opened	
LED indicator	[1] Warm-up [2] Alarm [3] Walk test end	[1] Warm-up [2] Alarm [3] Walk test end [4] Blocking detection
Operation temperature	-40°C to +60°C (-40°F to +140°F)	-40°C to +45°C (-40°F to +113°F)
Environment humidity	95% max.	
Internation protection	IP 54	
Mounting	Wall (Outdoor, Indoor)	
Mounting height	Multi level: 2.2 to 2.7 m (7' 3" to 8'11") Pet alley: 0.8 to 1.2 m (2' 7" to 4')	
Weight	180 g (6.35 oz)	195 g (6.88 oz)
Accessories	[1] Mounting screw (4 x 12 mm) x 2 [3] Area masking strips	[2] Lock screw (3 x 12 mm) x 1

- Specifications and designs are subject to change without prior notice.
- These units are designed to detect an intruder and activate an alarm control panel. Being only a part of a complete system, we cannot accept responsibility for any damages or other consequences resulting from an intrusion.

5-2. Dimensions

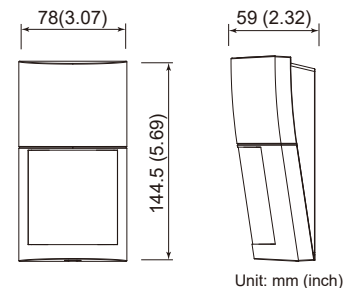

Unit: mm (inch)

■ EU contact information

Manufacturer:

OPTEX CO., LTD.
5-8-12 Ogoto, Otsu, Shiga, 520-0101 JAPAN

Authorized representative in Europe:

OPTEX (EUROPE) LTD./EMEA HEADQUARTERS
Unit 13, Cordwallis Park, Clivemont Road,
Maidenhead, Berkshire, SL6 7BU U.K.



OPTEX INC./AMERICAS HQ (U.S.)
www.optexamerica.com

OPTEX (EUROPE) LTD./EMEA HQ (U.K.)
www.optex-europe.com

OPTEX TECHNOLOGIES B.V.
(The Netherlands)
www.optex.eu

OPTEX CO., LTD. (JAPAN)
www.optex.net

OPTEX SECURITY SAS (France)
www.optex-europe.com/fr

OPTEX SECURITY Sp.z o.o. (Poland)
www.optex.com.pl

OPTEX PINNACLE INDIA,
PVT., LTD. (India)
www.optexpinnacle.com

OPTEX KOREA CO., LTD. (Korea)
www.optexkorea.com

OPTEX (DONGGUAN) CO., LTD.
SHANGHAI OFFICE (China)
www.optexchina.com

OPTEX (Thailand) CO., LTD. (Thailand)
www.optex.co.th

Copyright (C) 2019 OPTEX CO., LTD.