


CODE: **AWO220PU** v1.9/V
 NAME: **17/40/DSPR/S/PUSTA**



EN

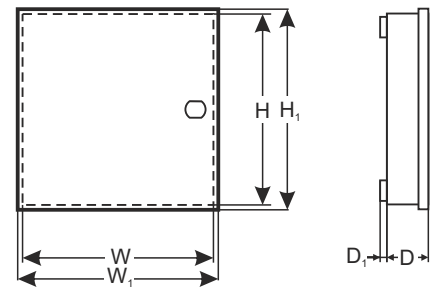

DESTINATION

DSC: PC1616, PC1832, PC1864, HS2016, HS2016-4, HS2032, HS2064, HS2128, HSM3204CX, HSM3050

Modules: PC4216, PC5200, PC5204, PC5400, HSM2204, HSM3408, PC4204, PC4020, HS3032, HS3128, HS3248, PC4108A, PC5108, PC5100, PC5320, HSM2208, HSM2108, PCL-422, IT-100, AMX-400 **Modules with mounting plate:**

Power Series Neo - LE2080(R), 3G2080(R), TL280LE(R), TL2803G, TL280(R)E, 3G2080,

Power Series - 3G2060(R), TL2603G(R), TL260(R)

PARADOX: E55, E65, 728ULT, EVO48, EVO192, SP4000, SP5500, SP6000, SP7000

Modules: Z X 8, Z X 4, HUB2, PGM4

RISCO: PRO24 z 17 Ah

PRO116, 128, 140

SATEL: CA10P, CA5P, CA-4VP, CA-6P

VERSA 5, VERSA10, VERSA15, VERSA PLUS, VERSA IP

PERFECTA16, PERFECTA32

Modules: CA64 PTSA, CA10E, MST-1, FTHM-2, INT-E, INT-ADR, INT-GSM, INT-KNX-2, INT-FI, INT-PP, INT-O, INT-R, INT-VMG, ETH-1 PLUS, ACCO-KP-PS, ACCO-KPWG-PS, GSM-X, GSM-XLTE

PYRONIX: MATRIX 424, 6, 816, 832, 832+

CROW: RUNNER 4,8

TEXECOM: PREMIER 412, 816, 832, 48, 88, 168, 640

TELMOR: TCA-824 + TEX800

ROGER: PR402, CPR 32-SE

EBS: PX 202A

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

TECHNICAL DATA

External dimensions of enclosure: W=320, H=305, D+D₁=90+8 [±2 mm]

External dimensions of front panel: W₁=325, H₁=310 [±2 mm]

Fitting battery: 7Ah, 17Ah/12 V Sealed Lead Acid (SLA)

Weight net/gross: 1,978 / 2.248 [kg]

Transformer: without transformer - can be mounted in the casing: TRP20, TRP40, TRZ40

Operating conditions: II environmental class, -10°C÷ 40°C

Material: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: opening, 0,5A@50 V DC max. NC - contacts

Closing: screwed: screw x 4

Notes: lock assembly possible, distance from wall (mounting surface) - 8mm, possibility of mounting tamper switch PKAZ066 detects detachment from the wall

Declaration, warranty: CE, 2 years from production date