

ATS1220

4 zones DGP input expander, small plastic housing

Data Gathering Panels

Data Gathering Panels (DGP) are used to expand the number of alarm inputs on the system and allow inputs and relays to be connected at a location remote from the Advisor MASTER panel. DGPs communicate via poll & reply messages and send alarms to the control panel for processing. The DGPs collect information from detectors, door contacts and other similar devices. There are DGPs available for conventional devices, wireless devices as well as for intelligent addressable devices. A special DGP is also available for collecting the information for either four doors or lifts.

System databus connection


The system databus is used to connect Data Gathering Panels (to provide extra zones) and Arming Stations to the ATS control panel. Remote devices can be up to 1.5 km from an ATS control panels. Arming stations and Data Gathering Panels must be connected via a 2 pair twisted shielded data cable from the system databus connection. (WCAT 52 is recommended). The shield of the data cable should be connected to earth at the ATS control panel and should be left disconnected at any other end.

Functionality

Should a failure in communications occur, the Data Gathering Panel remembers the last alarm in a system, helping to identify possible reasons for faults. Up to 15 DGP's can be connected directly to the Advisor Master panel. For every DGP expanded to more than 16 inputs, the total number of Data Gathering Panels in a system reduces by one. If a system has all its Data Gathering Panels fully expanded to 32 inputs, the physical number of Data Gathering Panels in a system becomes 8.

Product Overview

4-zone DGP with Output Connector (ATS1644 plastic housing included). Depending on the basic capacity of the control panel up to 15 input expanders can be used at a maximum distance of 1,5km from the control panel.

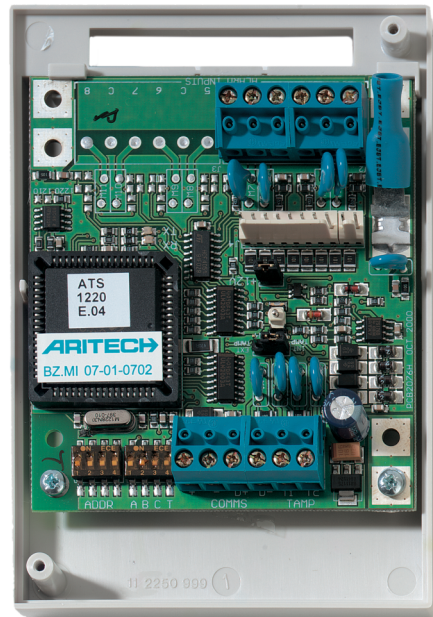

Details

- 4 inputs on board
- 8 OC outputs on board
- Plastic enclosure with opening tamper sensors

ATS1220

4 zones DGP input expander, small plastic housing

Technical specifications

General

| | |
|--------------------------|------------------------------|
| Expander type | Input expander |
| Product line | Advisor Advanced, ATS Master |
| Connection type | Databus connection |
| Max. distance from panel | 1.5 km |
| Max. per panel | 15 |
| Specified cable | WCAT 52/54 or equivalent |

Inputs

| | |
|---------|---|
| Total | 4 |
| Onboard | 4 |

Outputs

| | |
|---------------------------|----------------|
| Onboard | 8 (OC) |
| Type of outputs | Open Collector |
| Maximum number of outputs | 16 |

System

| | |
|------------|--------------|
| Addressing | DIP Switches |
|------------|--------------|

Electrical

| | |
|-------------------------|---|
| Operating voltage | 10.5 to 13.8 V |
| Power supply type | VDC |
| Power supply value | 10.5 to 13.8 VDC (powered by the panel bus) |
| Current consumption | 53 mA |
| Integrated power supply | No |

Physical

| | |
|---------------------|------------------------------|
| Physical dimensions | 124 x 87 x 34 mm (W x H x D) |
|---------------------|------------------------------|

Environmental

| | |
|-----------------------|--------------|
| Operating temperature | -10 to +55°C |
|-----------------------|--------------|

Data bus monitoring

| | |
|--|-----|
| | Yes |
|--|-----|

PCB dimensions

| | |
|--|------------|
| | 90 x 80 mm |
|--|------------|

