




# Signaline FT-88-R

## Fixed Temperature Linear Heat Detector

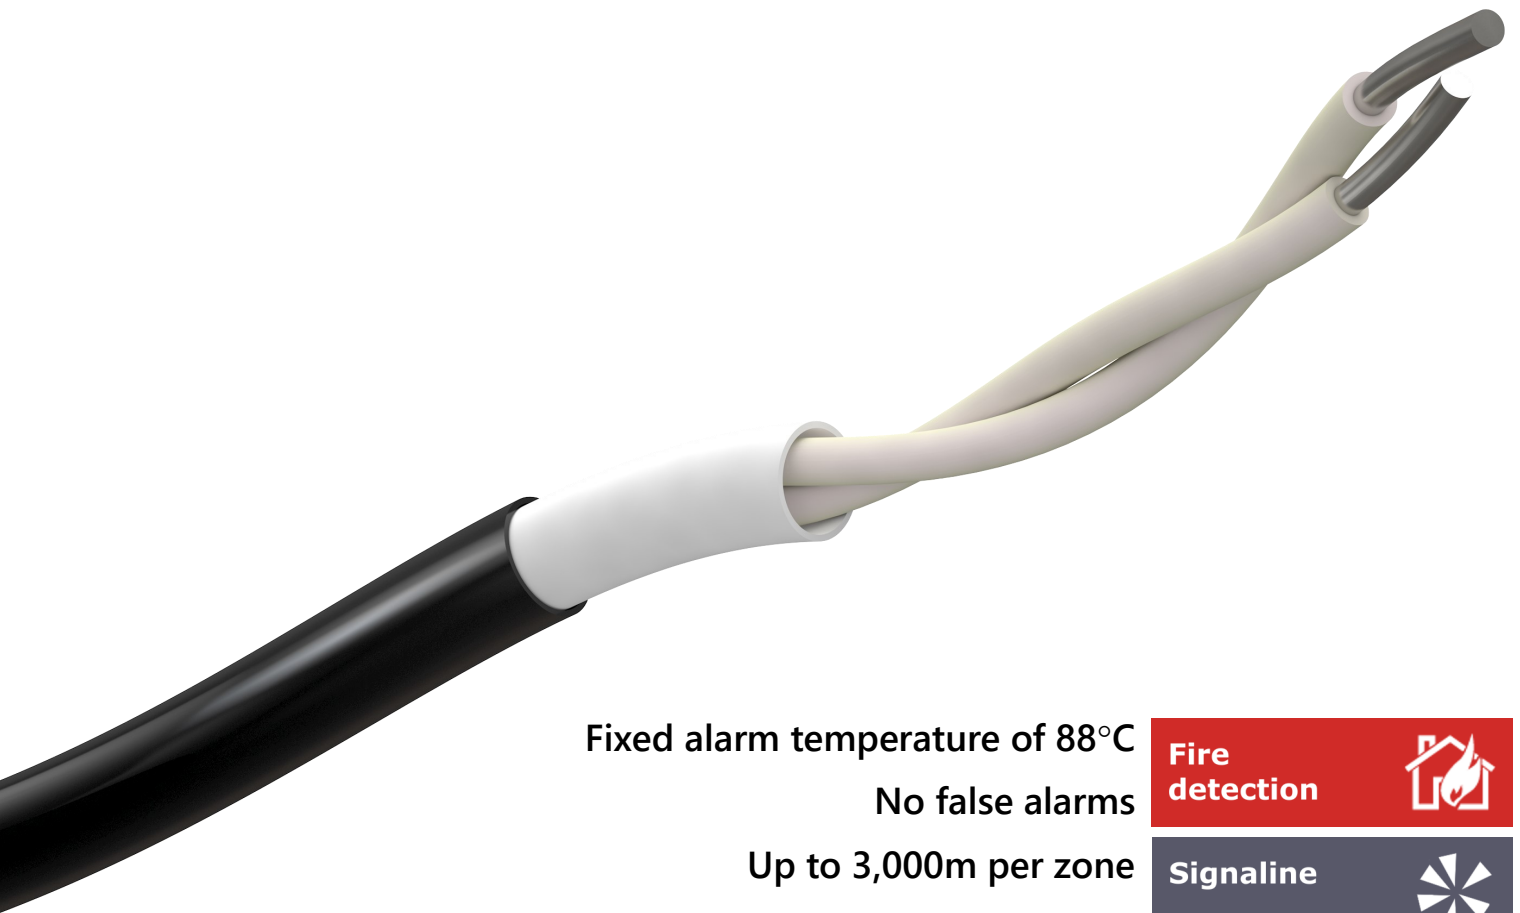

Fixed alarm temperature of 88°C  
No false alarms  
Up to 3,000m per zone  
Protective nylon extrusion

Fire  
detection



Signaline





<b>Model</b>	Signaline FT-88-R
<b>Alarm temperature</b>	88°C (190°F)
<b>Max ambient temp.</b>	70°C (158°F)
<b>Conductor resistance</b>	0.1Ω/M or 0.029Ω/FT @20°C
<b>Max voltage</b>	42Vdc or 30Vac
<b>Dielectric withstand (UL)</b>	500Vdc
<b>Tensile strength</b>	1700 N/mm <sup>2</sup>
<b>Minimum bend radius</b>	75mm
<b>Overall diameter</b>	4.5mm
<b>Weight</b>	16kg/500M
<b>Outer sheath material</b>	Chemical resistant nylon
<b>Colour</b>	Black
<b>Approvals</b>	UL, cUL


Signaline Fixed Temperature Linear Heat Detector (Signaline FT) can detect a build-up of heat anywhere along its length. When any point along the length of the cable reaches a predetermined temperature an alarm is initiated.

Signaline FT is available in multiple temperature settings and outer cover options, making the product suitable for use in a very wide range of applications.


Multiple fixing options and accessories are available.

Visit [Signaline.com](http://Signaline.com) for our complete catalogue.


### Conventional Systems



### Addressable Systems

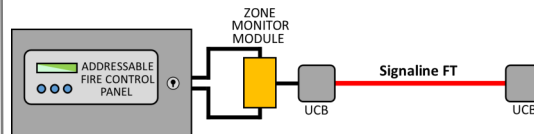

### Hazardous Areas

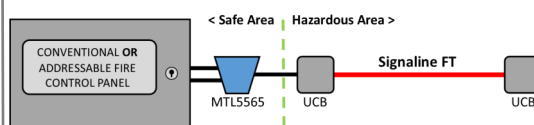

Compatible with the new  
Signaline LocatorPlus  
Dual Zone Monitor Module



Signaline FT cable is proudly  
manufactured in the UK