

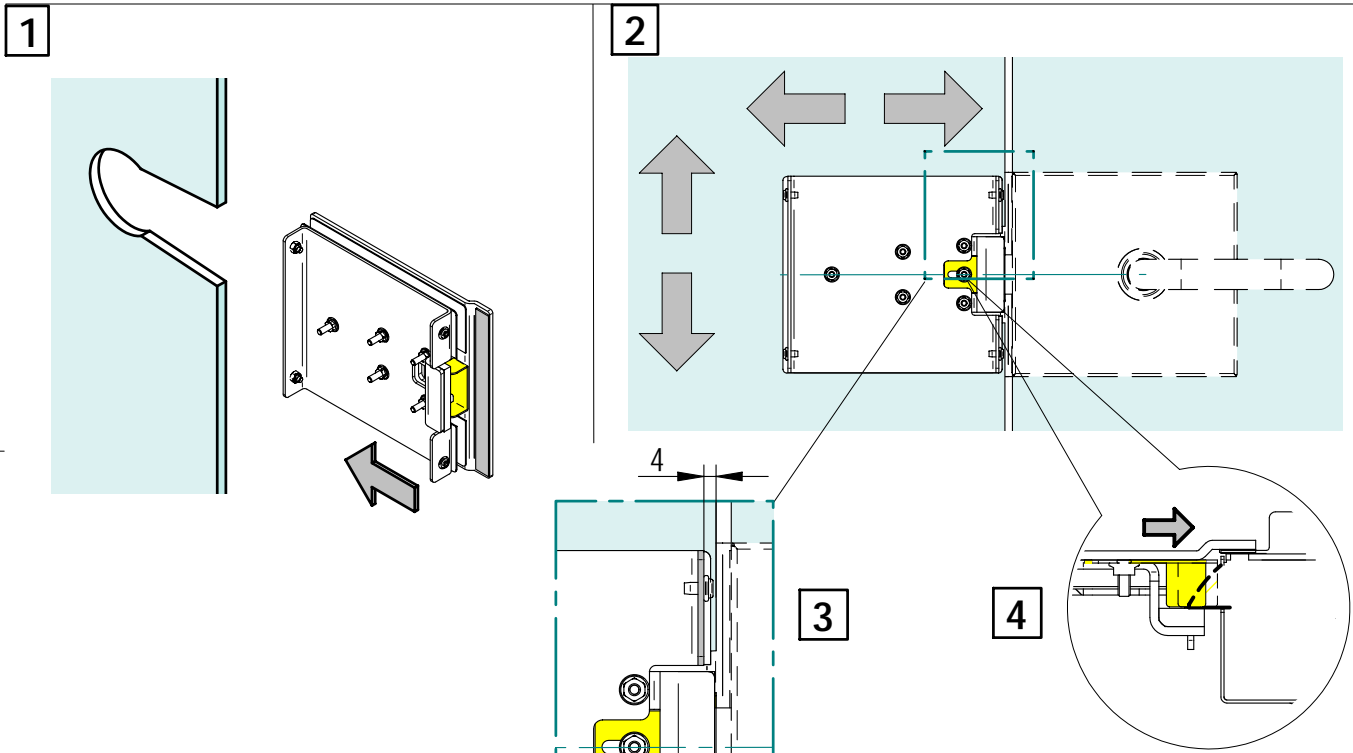


Installation guide Strike CEGMDD H IM CEGMDD R IM x

-NOCTH DIMEMNSIONS

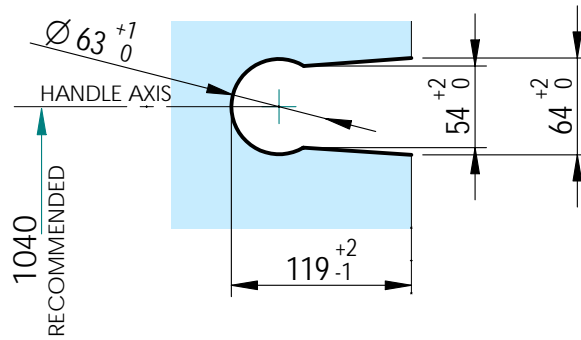

Adjustable cover latch

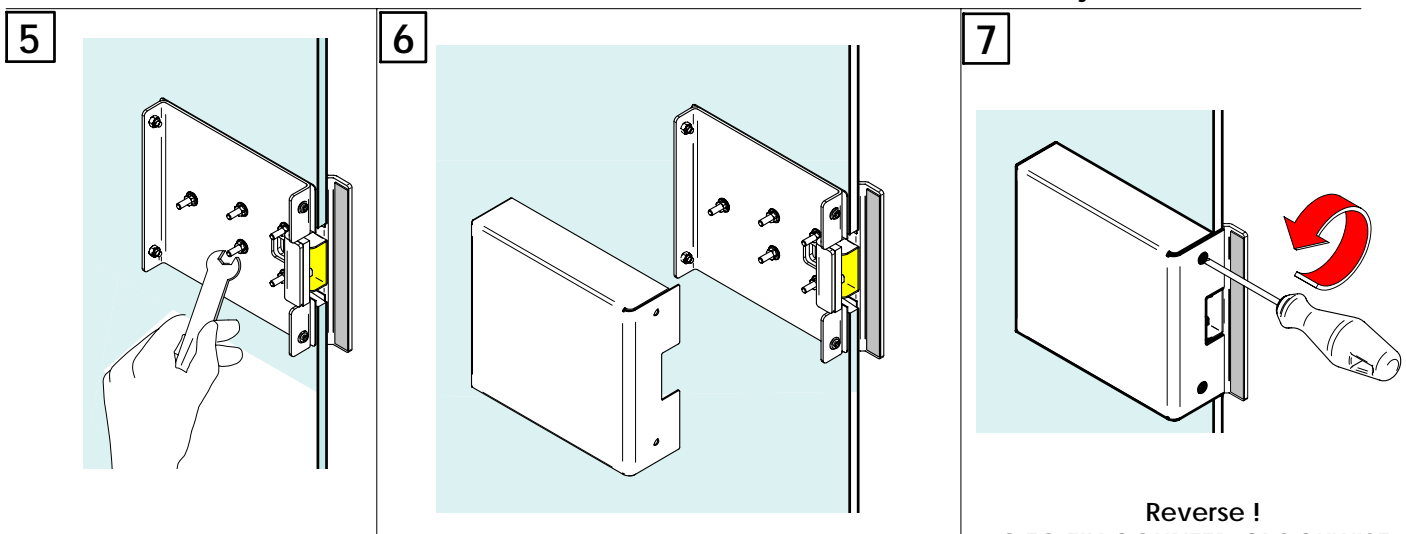

Reverse !

TO FIX COUNTER-CLOCKWISE

(E) -FIJACION: GIRAR SENTIDO ANTIHORARIO

(D) -GEGEN UHRZEIGERSINN FESTSCHRAUBEN

(F) -POUR FIXER, TOURNEZ EN SENS INVERSE

DES AIGUILLES D'UNE MONTRE

(I) -FISSAGGIO: GIRARE SENSO ANTIORARIO




Installation guide Strike CE GM DD H IM

CE GM DD R IM x



Strike
 Lock
 Double Door

Door Thickness
 Finish (Satin Stainless Steel)
 Handing

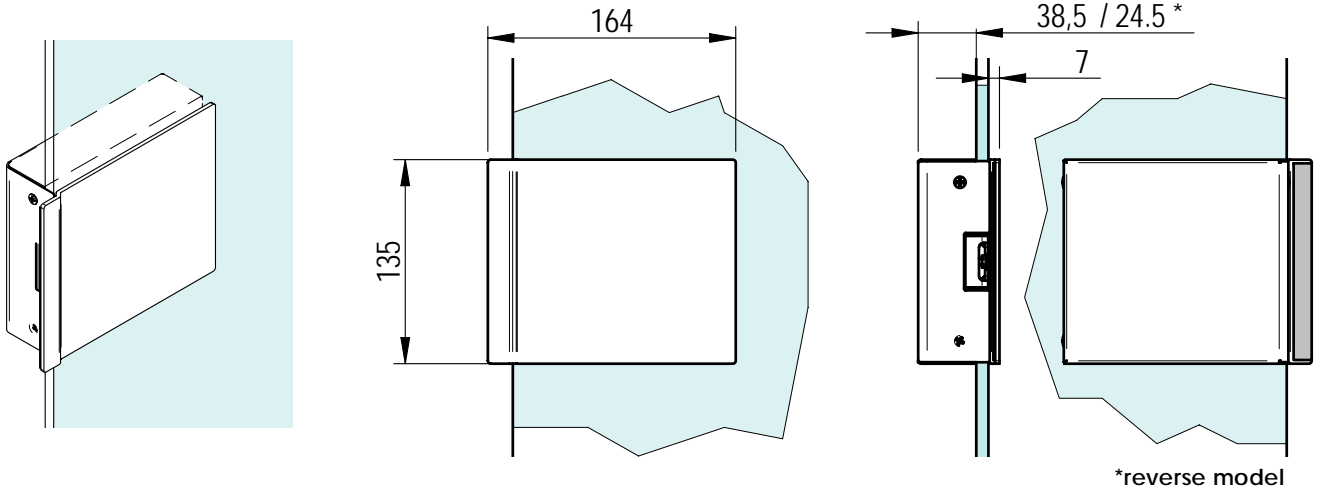


CEGMDD H IM

Normal Handing

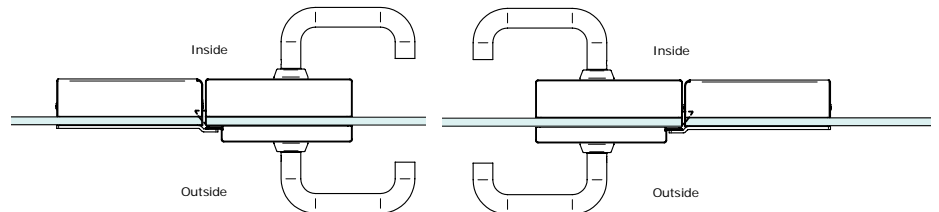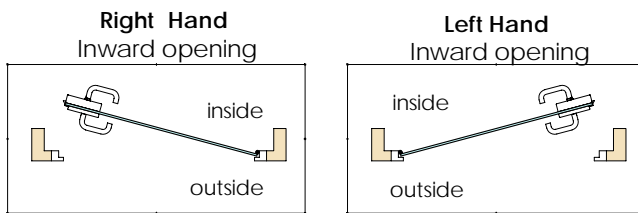

CEGMDD R IM x*

Reverse Handing

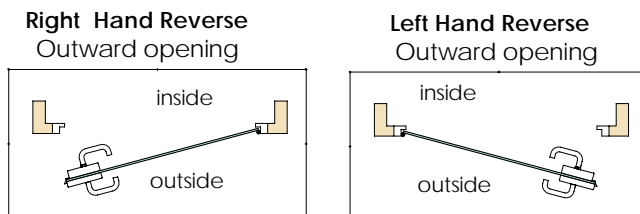

*x= DOOR THICKNESS

x	ref.
8 mm	8
10 mm	0
12 mm	2

