

# NZM 0002 A Notification appliance zone module

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Monitored control of signaling devices by voltage polarity reversal
- ▶ Ready to go thanks to plug-and-play technology and pluggable terminal blocks


The NZM 0002 A Notification Appliance Zone Module provides two monitored primary lines. This enables the connection of two separate notification appliance zone lines.

Connection of:

- Sirens
- Strobes
- Horns

The operating status of each zone is shown by a red and a yellow status LED.

## System overview

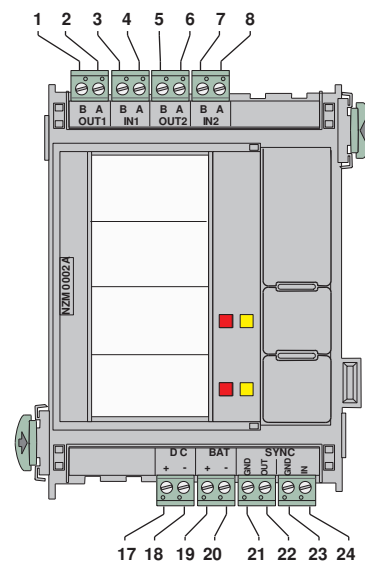

Pos.	Description	Connector
1 / 2	B OUT1/A OUT1	NAC zone 1
3 / 4	B IN1/A IN1	
5 / 6	B OUT2/A OUT2	NAC zone 2
7 / 8	B IN2/A IN2	
17 / 18	DC + / -	External power supply
19 / 20	BAT + / -	24 V DC input, battery voltage
21 / 22	SYNC GND/OUT	Synchronization output
23 / 24	SYNC GND/IN	Synchronization input

### Installation/configuration notes

- For operating the fire alarm system according to EN 54-13 the signaling device lines must be designed in loop topology.

### Parts included

Quantity	Component
1	NZM 0002 A Notification Appliance Zone Module
2	Labeling strips
2	3.9 kOhm resistors

### Technical specifications

#### Electrical

Input voltage	20 V DC to 30 V DC 5 V DC $\pm$ 5 %
Max. current consumption	
<ul style="list-style-type: none"> <li>Standby (2 zones)</li> </ul>	40 mA (at 24 V DC)

<ul style="list-style-type: none"> <li>Alarm (2 zones)</li> </ul>	65 mA (at 24 V DC)
Min. output voltage	20.2 V DC
Max. output voltage	29.5 V DC
Max. output current for power supply via rail	500 mA per notification appliance zone line (in the event of an alarm)
Max. output current for external power supply	2.8 A per notification appliance zone line (in the event of an alarm)
Max. cable length	Dependent on type and number of connected signaling devices

#### Mechanics

Operating/display elements	4 LEDs (2 x red, 2 x yellow) 2 keys (LED test)
Housing material	ABS plastic, Polyac PA-766
Housing color	Satin finish, anthracite, RAL 7016
Dimensions	Approx. 127 x 96 x 60 mm
Weight	Approx. 135 g

#### Environmental conditions

Permitted operating temperature	-5 °C to 50 °C
Permitted storage temperature	-20 °C to 60 °C
Permitted relative humidity	95 %, non-condensing
Protection class as per IEC 60529	IP 30

### Ordering information

**NZM 0002 A Notification appliance zone module**  
for connecting 2 separate notification appliance zone lines, provides 2 monitored primary lines  
Order number **NZM 0002 A**

#### Represented by:

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
emea.securitysystems@bosch.com  
emea.boschsecurity.com

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany  
www.boschsecurity.com

**North America:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
onlinehelp@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia